



AIR VENT VALVE

Feature

- All wetted parts are made of NEW PFA and PTFE suitable for use in high purity and high corrosive chemical handling applications.
- Compact, light and high reliable design.

Specifications

Type : PAV

Operation method : **Manual**

Connecting method : **Tube fitting (Super 300 type fitting)**


Max operation pressure : **0.3MPaG {42.66PSIG}**

Max operation temperature : **80°C {176°F}**


Ambient temperature : **60°C {140°F}**

Fluid : **Chemical & DI water liquids.**

Operation pressure and Temperature range

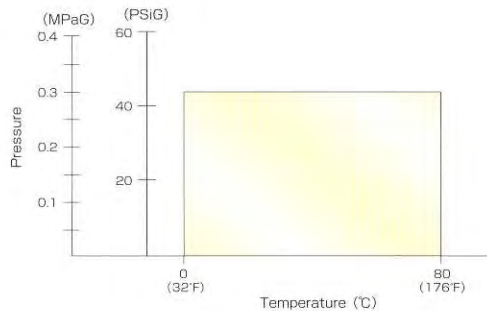

Remarks : Trademark of E.I. duPont de Nemours and Co. (Inc.)
Super Fitting is also available.

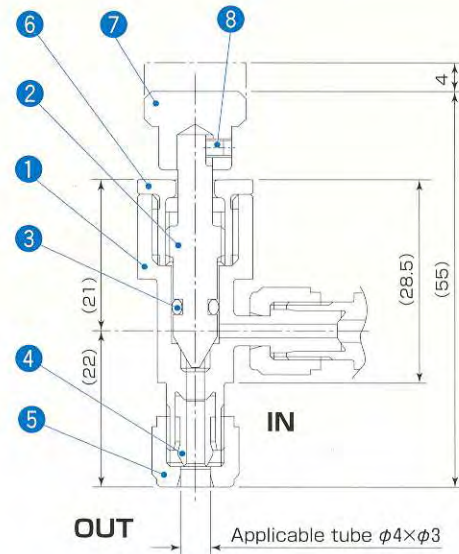

Main parts list

No.	Parts	Material
1	Body	PFA
2	Needle	PFA
3	O-RING	Kalrez®
4	Sleeve	PFA
5	Union nut	PFA
6	Clamp nut	P.P
7	Knob	PVdF
8	Bolt	SUS316

Type No. & O-RING Material

Type No.	O-RING	Knob
PAV P4-4-K	Kalrez®	Natural (PVdF)
PAV P4-4-E	EPDM	Black (PVdF)

NIPPON PILLAR PACKING CO., LTD.

Head Office : 11-48, Nonakaminami 2 Chome, Yodogawa-ku, Osaka, 532-0022 Japan.
Tel : 81-(0)6-6305-2821 Fax : 81-(0)6-6302-3300
E-mail : info@pillar.co.jp

Tokyo Office : 2-2, Uchisaiwaicho 2 Chome, Chiyoda-ku, Tokyo, 100-0011 Japan.
Tel : 81-(0)3-3508-1611 Fax : 81-(0)3-3508-1881

Nippon Pillar Corporation of America : 1562, Parkway Loop, Suite2C, Tustin, CA 92780, USA.
Tel : 1-714-258-7741 Fax : 1-714-258-7760
E-mail : sales@nipponpillar.com

Nippon Pillar Singapore Pte, Ltd. : Blk 71 Ayer Rajah Crescent, #06-20/23 Ayer Rajah Industrial Estate Singapore 139951
Tel : (65)6861-7138 Fax : (65)6862-9098
E-mail : npillars@singnet.com.sg


Taiwan Pillar Industry Co.,Ltd. : 5F, #54 Chung Shan N.Road, Section 3, Taipei, Taiwan.
Tel : (886)-2-2587-1911 Fax : (886)-2-2585-3131
E-mail : sales@taiwanpillar.com.tw

Pillar Korea Semiconductor Work Shop : 55-1, Changkoc-1RI, Paltan-Myun, Hwasung-Kun, Kyoungki-Do, Korea.
Tel : 031-353-1521 Fax : 031-353-1522
E-mail : hanjongeng@hotmail.com

<http://www.pillar.co.jp/> e-mail : info@pillar.co.jp

*Specifications and dimensions are subject to change without prior notice.

*The data on this catalogue are solely for your reference and are not to be construed as constituting a warranty.



- Follow the instructions, before installation and operation, for your safety.